

TYPICAL FENCE OR RAILING CONNECTIONS TO ROSETTA OUTCROPPING BLOCKS

CONNECTION OPTION #1


Core through Outcropping Blocks at Desired Post Locations and Grout Posts in Place

Posts Can Be Installed as Deep as Needed to Provide Sufficient Weight to Resist Overturning Forces on Railing

CONNECTION OPTION #2

Connect Mounting Flange to Top Block with Expansion Anchor Bolts


Weight of Top Block is Available to Resist Overturning Forces on Railing

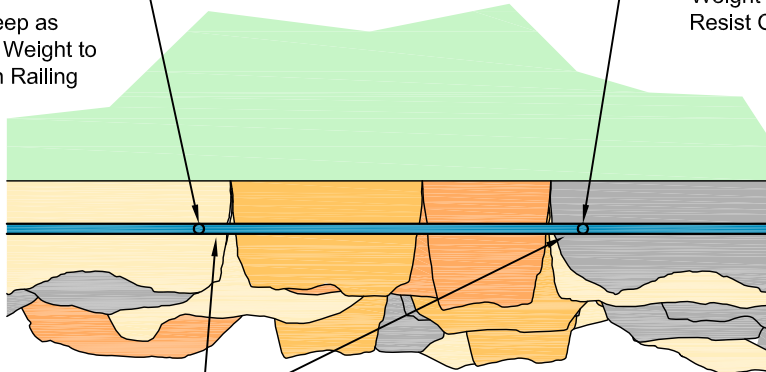

Maintain Cover As Needed From All Edges of Block (4" Minimum) (Typical, All Connections)


Top View

(NO SCALE)

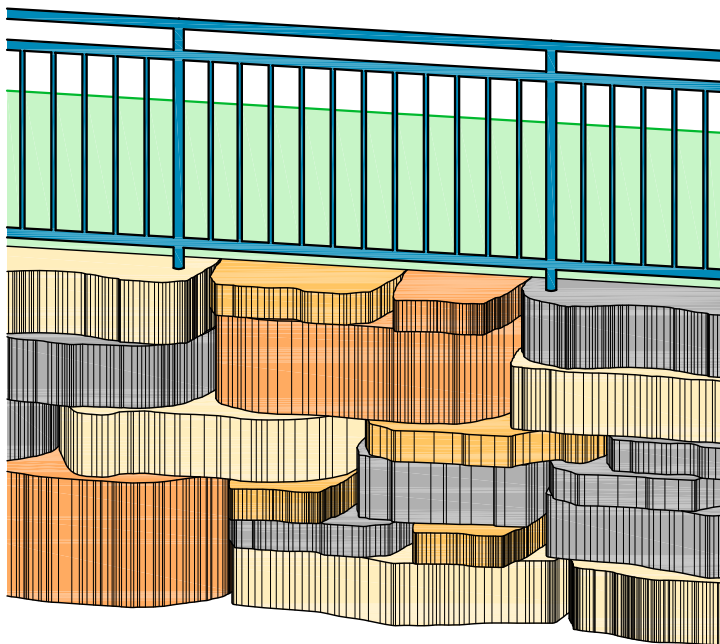

Front View

(NO SCALE)

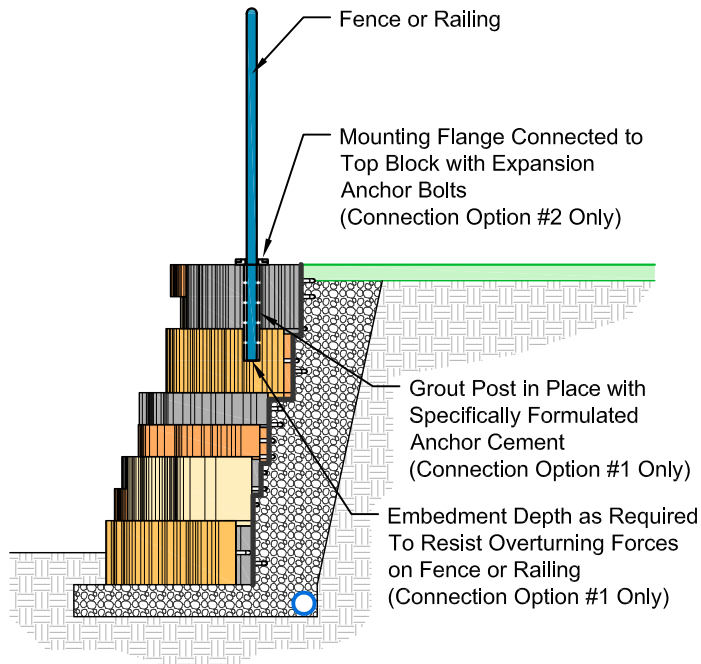

Side View

(NO SCALE)

DRAWN BY:
J. Johnson

APPROVED BY:

DATE:
November 9, 2011

SHEET NO. :
1 of 1

TITLE:

TYPICAL FENCE OR RAILING CONNECTIONS
TO ROSETTA OUTCROPPING WALLS

DRAWING FILE:
Railing - Typical Installation 110911.dwg

ROSETTA
HARDSCAPES, LLC

05481 US 31 SOUTH CHARLEVOIX, MI 49720
877-777-6558 • 231-237-9656 Fax • www.discoverrosetta.com